

## FEATURES

- Supports leading HF smart labels  
Reads/writes different tags and smart labels via a single module
- Single connection to serial interface and power supply  
Connects easily to existing devices
- Standard baud rate and serial level  
Permits plug and play interfacing to a wide range of devices
- Secure firmware download facility via the serial interface  
Allows field upgrades for future firmware releases
- Built-in antenna and switchable attenuator  
Allows for easy integration and variable power output
- On-board fuse  
Provides protection against power surges

## TAGS SUPPORTED

ISO 15693  
Inside PicoTag™  
Philips I-CODE  
TI-RFID™ Tag-it™  
EPCglobal™ HF

## INfinity 167

### High Frequency 13.56 MHz RFID & Smart Label OEM Reader Module


#### Overview

The INfinity 167 is a versatile RFID reader component that supports most leading 13.56 MHz tags and smart labels. Based on the popular Sirit INfinity 166 reader, the INfinity 167 reader module has been modified to incorporate an on-board antenna. Its compact design provides versatility and easy integration within a wide range of industrial automation products.

Connection to the INfinity 167 is made via a single connector, which provides the board with power and provides an easy way to connect to existing devices. In addition, to enable future upgrading of new tag types and code enhancements, firmware can be flash upgraded through the serial interface. This permits the product to be easily updated in its surrounding environment.

#### Applications

Typical applications for the INfinity 167 include industrial printers for the programming of smart labels at source, non life-critical medical applications, product verification and access control.

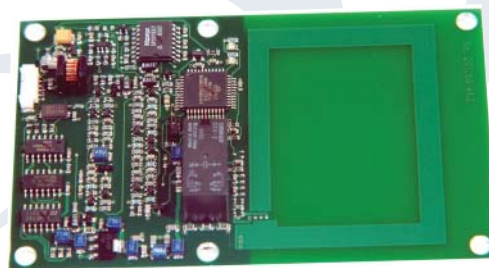

# INfinity 167

## 13.56 MHz RFID Reader Module with Integrated Antenna



### Performance Characteristics

Frequency:	HF Band, 13.56 MHz
Supported Transponders:	ISO 15693, Inside PicoTag, Philips I-CODE, TI-RFID Tag-it, EPCglobal HF
Communications Protocol:	Serial packet based with proprietary error detection
Communications Parameters:	Reader: 9600    Bootloader: 57600
Communications Signal Level:	RS232
Interface Connector:	Single 5-pin Molex connector for power and communications
Antenna Type:	Integrated antenna
Upgradeable Firmware:	Yes


### Physical Characteristics

Dimensions (LxWxD):	108.3 x 68.0 x 13.4 mm (4.26 x 2.68 x 0.52 in.)
Weight:	32 g (1.13 oz.)
Mounting:	4 corner-mounted holes of 4 mm (0.16 in.)

### Environment

Operating Temperature:	-30°C to +70°C (-22°F to 158°F)
Storage Temperature:	-40°C to +85°C (-40°F to 185°F)
Relative Humidity:	80%, non-condensing
Power:	
Input Voltage:	+5 VDC $\pm$ 5%, <50 mV ripple
Active Current:	210 mA
Standby Current:	N/A
Idle:	70 mA
RF Output Power:	120 mW max
Regulatory:	Final application dependent

Model:

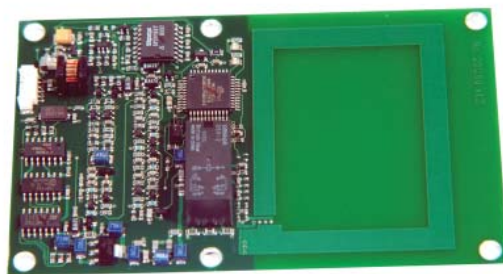

INfinity 167 HF Reader Module with Integrated Antenna

SIRIT - CANADA  
372 Bay Street, Suite 1100  
Toronto, ON M5H 2W9 Canada  
Tel: 416.367.1897  
Fax: 416.367.1435

SIRIT - USA  
1321 Valwood Parkway, Suite 620  
Carrollton, Texas 75006 USA  
Tel: 972.243.7208  
Fax: 972.243.8034

For more information,  
contact sales toll free  
at 1.866.338.9586

E-mail: [sales@sirit.com](mailto:sales@sirit.com)

[www.sirit.com](http://www.sirit.com)

### About Sirit Inc.

Sirit Inc. (TSX: SI) is a leading provider of Radio Frequency Identification (RFID) reader technology to OEMs and solution providers worldwide. Harnessing the power of Sirit's enabling-RFID technology, customers are able to more rapidly bring high quality RFID solutions to the market with reduced initial engineering costs. Sirit's products are built on more than 13 years of RF domain expertise addressing multiple frequencies (LF/HF/UHF), multiple protocols and are compliant with global standards. Sirit's broad portfolio of products and capabilities are easily customized to address new and traditional RFID market applications including Supply Chain & Logistics, Cashless Payment, Access Control, Automatic Vehicle Identification, Inventory Control & Management, Asset Tracking and Product Authentication. For more information, visit [www.sirit.com](http://www.sirit.com).



The "RFID by Sirit" symbol signifies that Sirit Inc.'s high quality RFID reader technology resides within this product.

© 2005 Sirit Inc., all rights reserved. "Sirit", the Sirit Design, "RFID by Sirit", the RFID by Sirit Design and "vision beyond sight" are all trademarks of Sirit Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

IN167\_06\_07 rev04